


MTNTK

PERFORMANCE

The '18- Current New Body Ranger XP 1000 Ride Command | North Star Edition Blow Hole Instructions

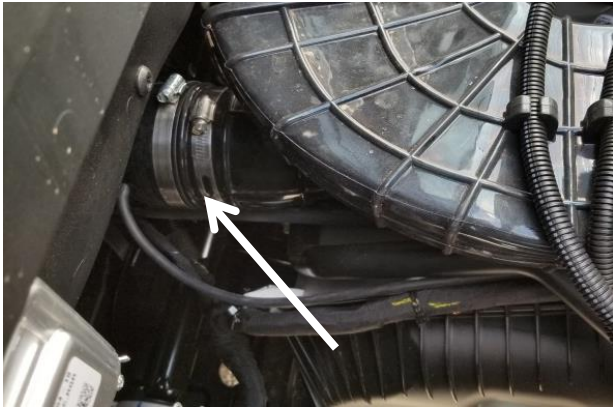

1. Locate the clutch housing intake duct hose. Loosen the clamp holding the hose connection together and separate the intake duct hose from the plastic connector. Leave plastic connector in place with hose connection.



2. Install the Blow Hole onto the Clutch housing intake duct hose plastic connector as shown. Then install the intake duct hose onto the Blow Hole assembly. Tighten both clamps.



3. Unplug tail light harness connector and plug in Blow Hole connector in line. Properly route and secure wires and connectors with cable ties as needed to prevent damage.

Disclaimer: Never attempt to adjust or run engine with fan on. Do not stick your fingers into the fan housing as it will cut or dismember. MTNTK Performance is not responsible for damages incurred by using this product or improper installation.

Kit Contents:

1 - MTNTK Performance
Blow Hole with Harness

1- #56 Clamp

MTNTKperformance.com

| 950 W 4th N Saint Anthony, ID 83445 | P. 208-652-0122 | Email: orders@mtntkperformance.com |